

20mm H3.1 vertical cavity batten with separation layer over

Bevelbord extruded aluminium cladding installed by Flashclad Nationwide Distributor Network

NOTE:
Fixing into studs at maximum 600mm centres


Flashclad extruded aluminium Cavity Base Starter
Fixings at 600 crs

35mm min. at highest point of deck / roof

Deck membrane on structure

Building wrap or Rigid Air Barrier installed as per manufacturers specification

Fully support membrane 150mm min.

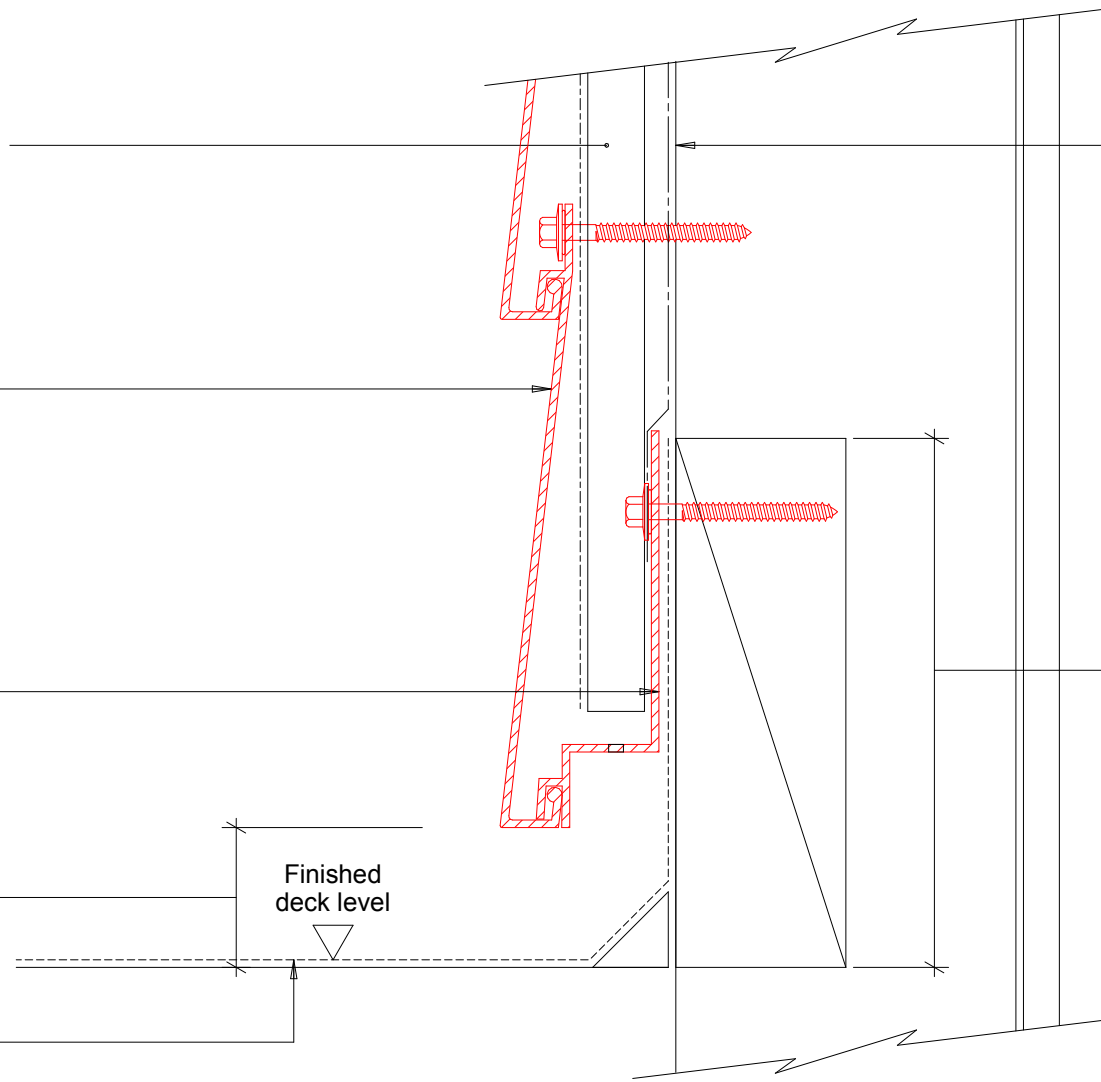

Flashclad
CLADDING FOR LIFE

ENCLOSED BALCONY BASE

Original Scale 1:2

Revision - 01 December 2015

Bevelbord