

20mm H3.1 vertical cavity batten with separation layer over

Horizontally fixed Dualbord extruded aluminium cladding installed by Flashclad Nationwide Distributor Network

NOTE:
Fixing into studs at maximum 600mm centres

35mm min. at highest point of deck / roof


Deck membrane on structure

Building wrap or Rigid Air Barrier installed as per manufacturers specification

Flashclad extruded aluminium Dualbord Base Starter

Fully support membrane 150mm min.

Flashclad extruded aluminium Cavity Base Starter Fixings at 600 crs

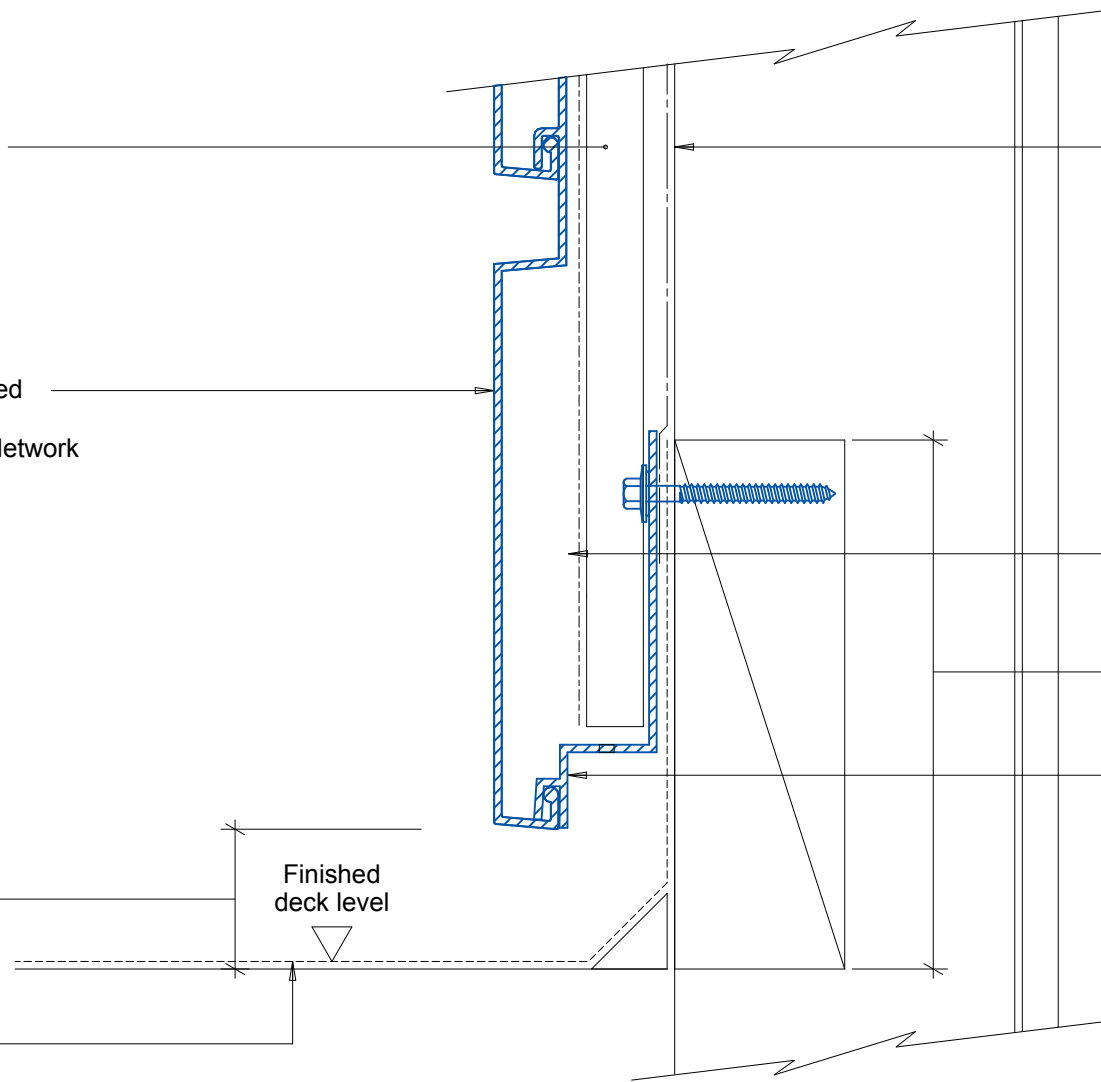

Flashclad
CLADDING FOR LIFE

ENCLOSED BALCONY BASE

Original Scale 1:2
Revision - 24 November 2015

Dualbord
HORIZONTAL