


Horizontally fixed Eurobord extruded aluminium cladding installed by Flashclad Nationwide Distributor Network

NOTE:
Fixing into studs at maximum 600mm centres

Flashclad extruded aluminium 2 Part Jamb

Flashclad extruded aluminium Sill

NOTE:
Sill provides full joinery support (wanz bar not required)

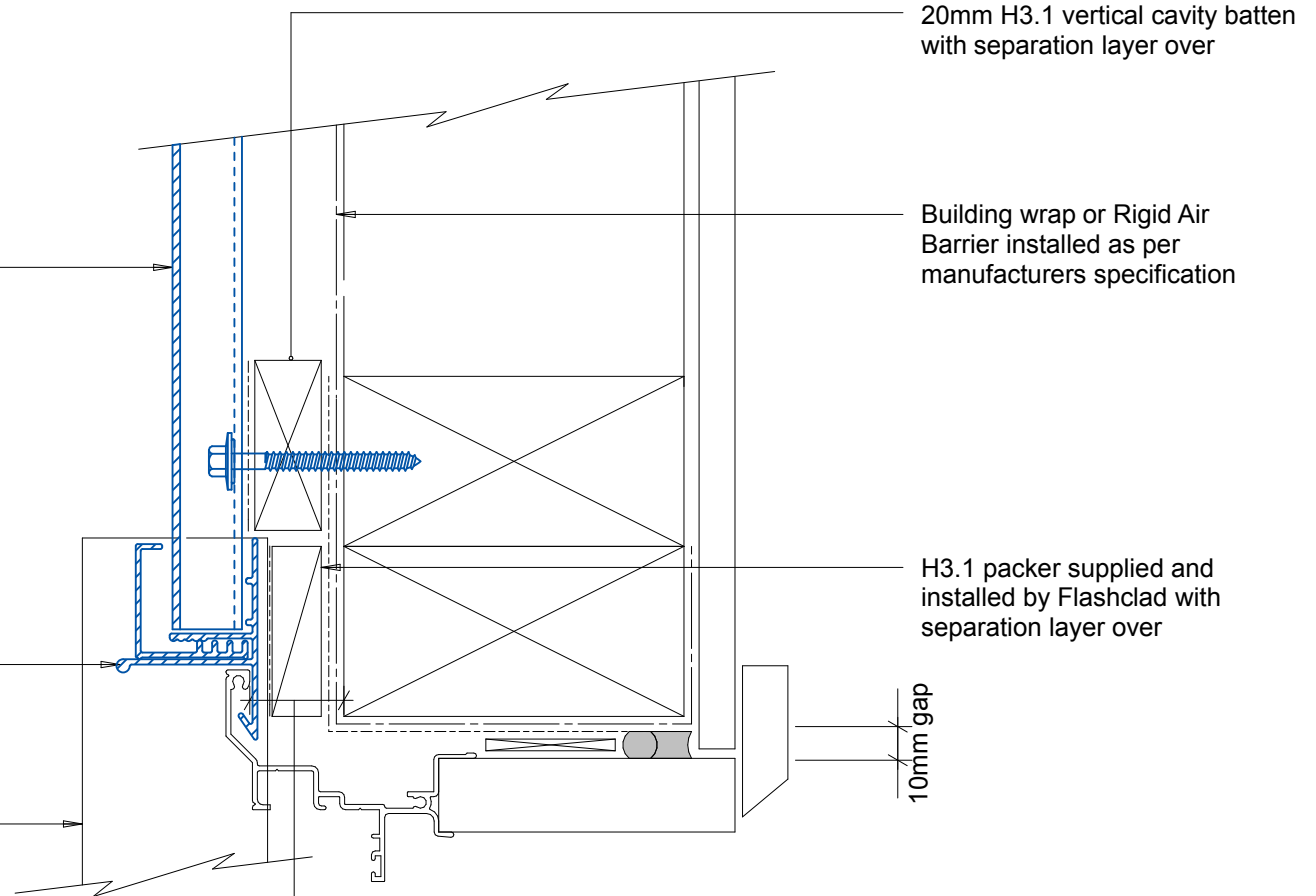

25mm from the outside face of the framing (for building wrap detailing) or 25mm from the outside face of the Rigid Air Barrier to the back of the aluminium window or door frame

NOTE:
Aluminium joinery installed with flashing tape and air seal over PEF backing rod as per NZBC E2/AS1