

Horizontally fixed Eurobord extruded aluminium cladding installed by Flashclad Nationwide Distributor Network


NOTE:
Fixing into studs at maximum 600mm centres

20mm H3.1 vertical cavity batten with separation layer over

Building wrap or Rigid Air Barrier installed as per manufacturers specification

Fully support membrane 140mm min.

Deck membrane on structure

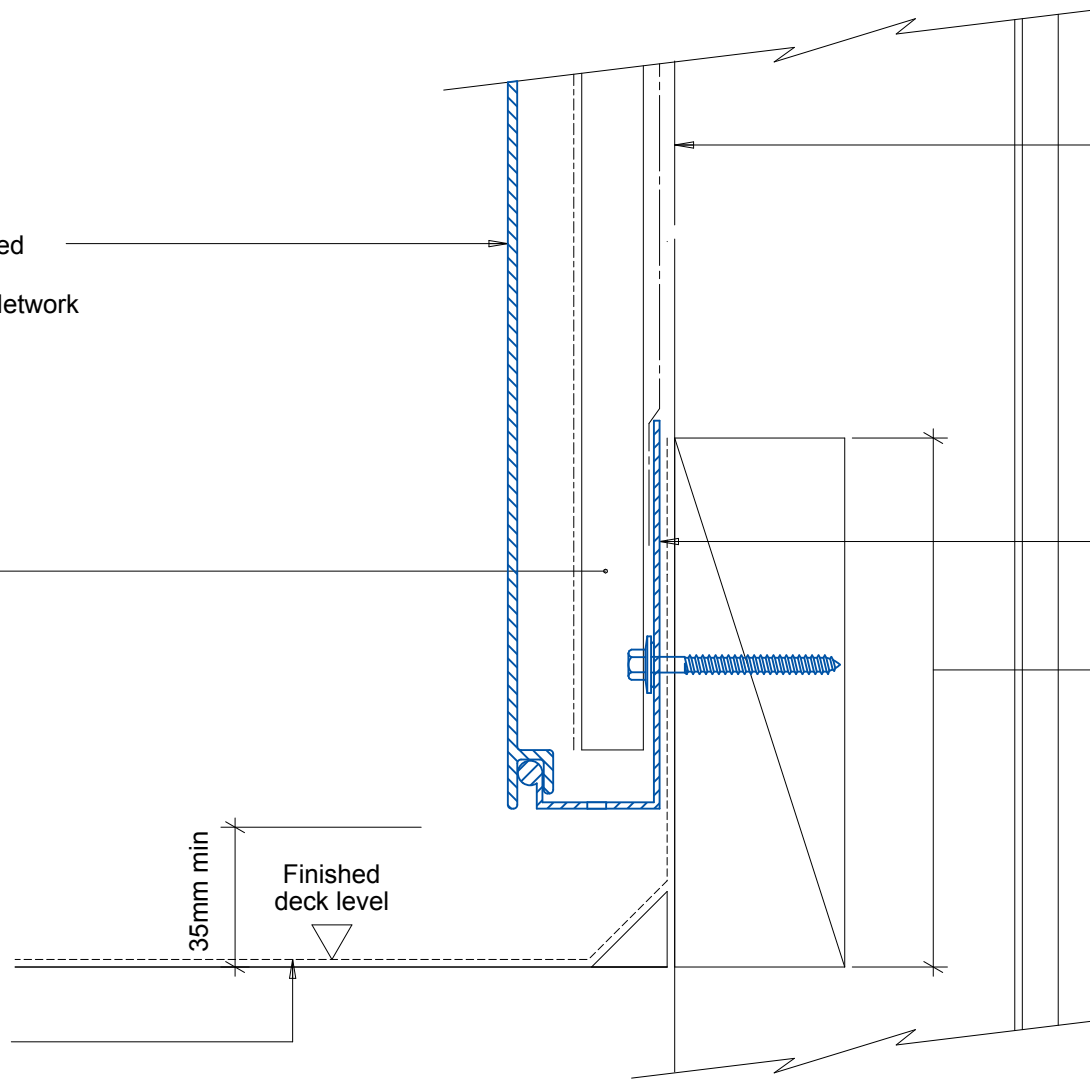

ENCLOSED BALCONY BASE

Original Scale 1:2
Revision - 20 October 2015

Eurobord

HORIZONTAL