Copyright © 2013 Flashclad Dualbord

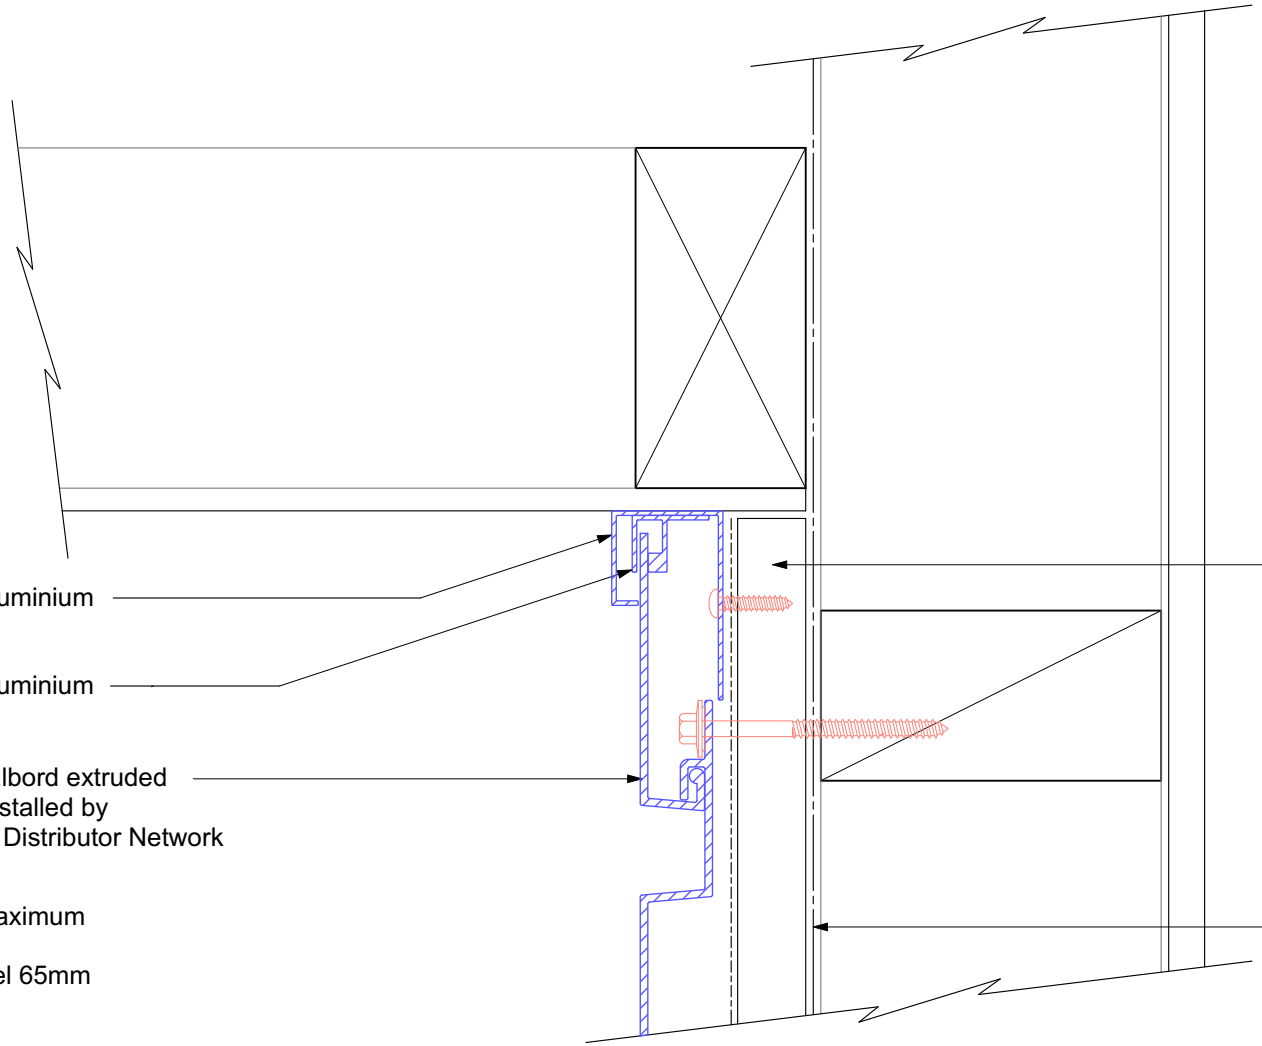

Flashclad extruded aluminium Cover Mould

Flashclad extruded aluminium Locator

Horizontally fixed Dualbord extruded aluminium cladding installed by Flashclad Nationwide Distributor Network

NOTE:
Fixing into studs at maximum 600mm centres.
Type 17 stainless steel 65mm roofing screws.

20mm H3.1 vertical cavity batten with separation layer over

Building wrap or Rigid Air Barrier installed as per manufacturers specification

Flashclad
CLADDING FOR LIFE

SOFFIT DADO

Original Scale 1:2

Revision - 01 October 2019

Dualbord
HORIZONTAL