

Vertically fixed Dualbord extruded aluminium cladding installed by Flashclad Nationwide Distributor Network


NOTE:
Dualbord Vertical can be fixed to dwang lines at **600mm or 800mm** centres.
Type 17 stainless steel 65mm roofing screws.

Building wrap or Rigid Air Barrier installed as per manufacturers specification

H3.1 200mm long packers

Flashclad extruded aluminium External Corner with Locators

20mm H3.1 horizontal cavity battens at maximum 800crs with 15 deg slope to top edge and separation layer over

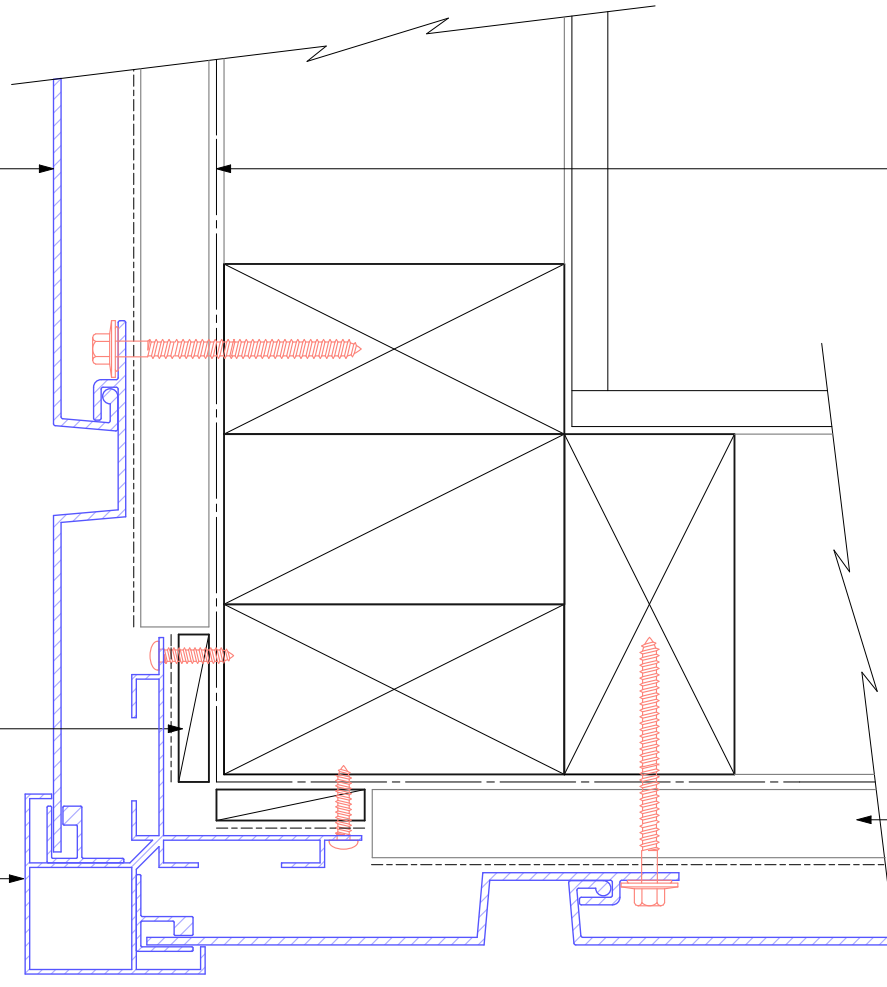

Flashclad
CLADDING FOR LIFE

EXTERNAL CORNER
Original Scale 1:2
Revision - 01 October 2019

Dualbord
VERTICAL