

NOTE:
An interstorey junction is only required if the building is over 2 story or 7m in height

Vertically fixed Euro-rib powder coated aluminium cladding installed by Flashclad Nationwide Distributor Network

NOTE:
Euro-rib Vertical can be fixed to dwang lines at **600mm or 800mm** centres
Type 17 stainless steel 65mm roofing screws


Flashclad extruded aluminium Vertical Starter

5mm minimum gap

Euro-rib face clip

Flashclad extruded aluminium 2 part jamb
15° slope to purpose made inter-storey flashing

Vertically fixed Euro-rib powder coated aluminium cladding installed by Flashclad Nationwide Distributor Network

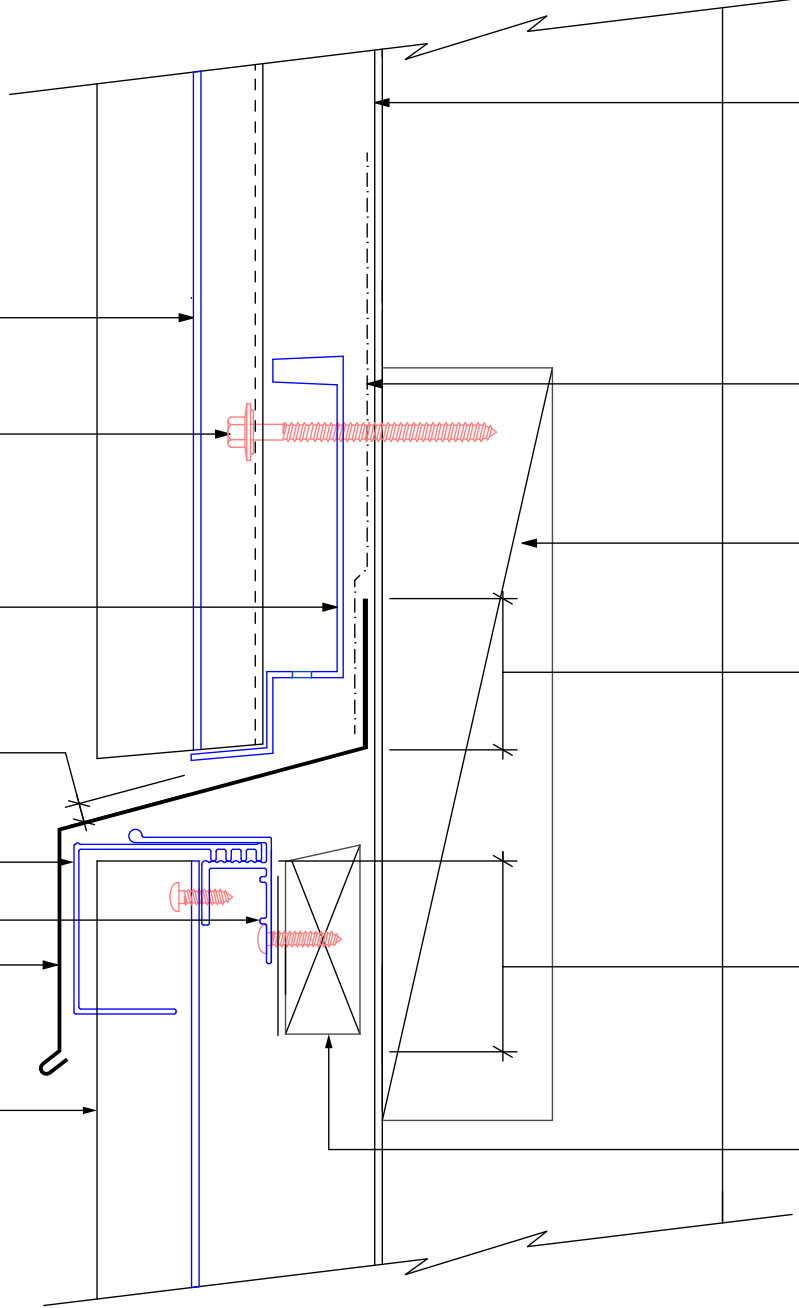

Building wrap or Rigid Air Barrier installed as per manufacturers specification

Flashing tape or extra layer of building wrap over flashing

190x45 dwang on edge for fixing

35mm minimum cover

35mm minimum cover

20mm H3.1 horizontal cavity battens at maximum 800crs with 15 deg slope to top edge and separation layer over



INTERSTOREY JUNCTION
Original Scale 1:2
Revision - 05 August 2021

